

CK24 A


Material features
PA6 with 30% fiberglass

Speed
9 m/sec

Operating temperature
-30 °C – + 130 °C



- L** Calculation of the chain length
- HM** Travel distance
- X** Mounting height
- Y** Radius length
- H** Pitch

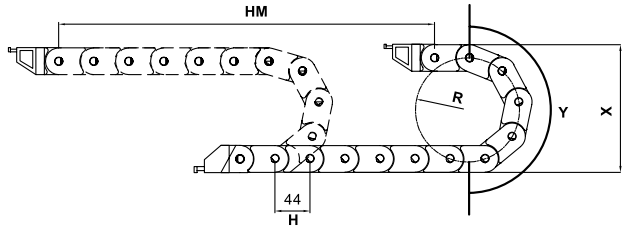


$L = HM / 2 + Y$

$X = R \times 2 + C$

$Y = R \times \pi$

Bending radius	40	75	100	125
H (mm)	44	44	44	44
X (mm)	112	182	232	282
Y (mm)	126	236	314	393


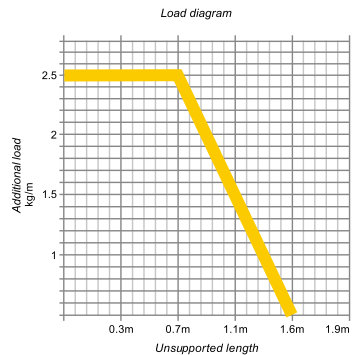


CK24 A

Openable from inside

Matchcode

CK24 **A** **025** **R075**
 Inner height Open series Inner width Bending radius

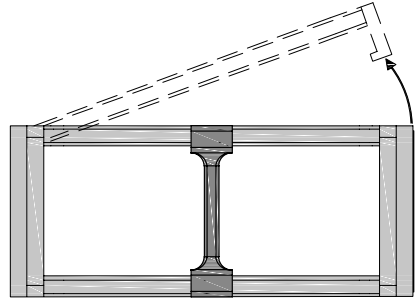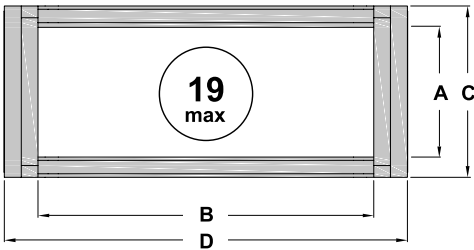


CK24 A	A	B	C	D	R	W
Model	Inner height (mm)	Inner width (mm)	Outer height (mm)	Outer width (mm)	Bending radius	Weight kg/m
CK24 A 025 R ...	24	25	32	39	75, 100, 125	0,582
CK24 A 040 R ...	24	40	32	54		0,621
CK24 A 050 R ...	24	50	32	64		0,658
CK24 A 060 R ...	24	60	32	74		0,668
CK24 A 080 R ...	24	80	32	94		0,685
CK24 A 100 R ...	24	100	32	114		0,700




Vertical Separator dimensions

CK24 SP

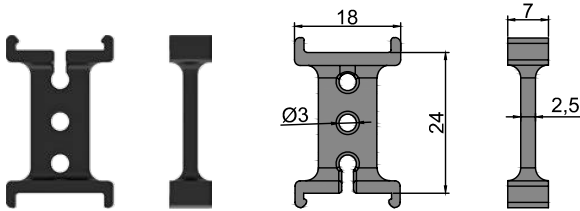


End bracket assembly

CK24 P

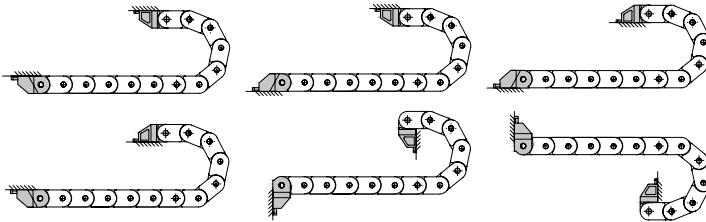



Polymer End bracket assembly dimensions

CK24 P



CK24 P025

CK24 P040

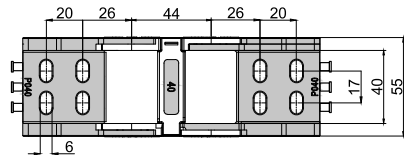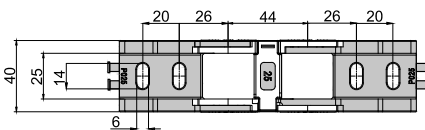

CK24 P050

CK24 P060

