

Ck25 A

Openable from inside and outside


Material features
PA6 with 30% fiberglass

Speed
7 m/sec

Operating temperature
-30 °C – + 130 °C



- L Calculation of the chain length
- HM Travel distance
- X Mounting height
- Y Radius length
- H Pitch

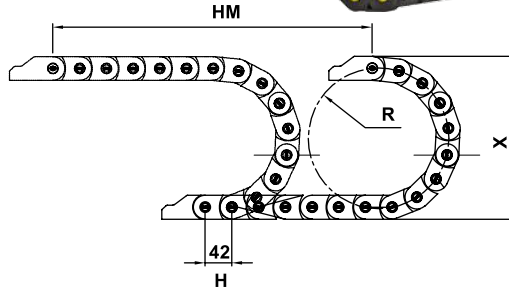


L = HM / 2 + Y

X = R x 2 + C

Y = R x TT


Bending radius	40	75	100	125
H (mm)	42	42	42	42
X (mm)	122	192	242	292
Y (mm)	126	236	314	393

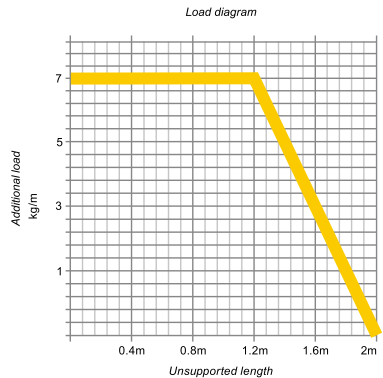

CK25 A

Matchcode

CK25 **A** **040** **R075**
 Inner height Open series Inner width Bending radius

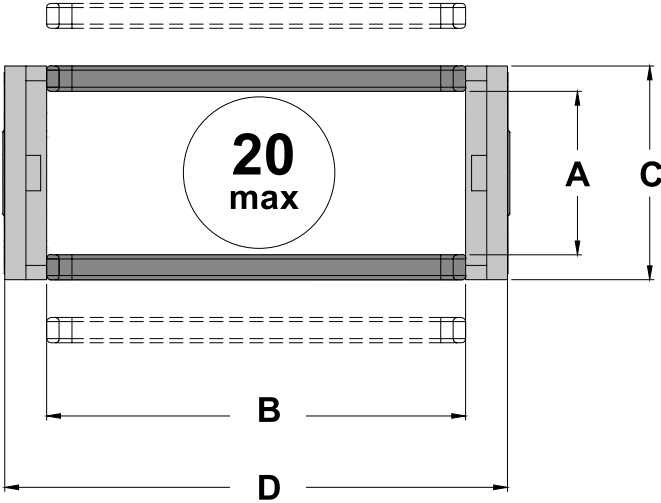


CK25 A	A	B	C	D	R	W
Model	Inner height (mm)	Inner width (mm)	Outer height (mm)	Outer width (mm)	Bending radius	Weight kg/m
CK25 A 040 R ...	25	40	42	62	40, 75, 100, 125	1,044
CK25 A 050 R ...		50		72		1,092
CK25 A 060 R ...		60		82		1,140
CK25 A 080 R ...		80		102		1,236
CK25 A 100 R ...		100		122		1,332




Vertical Separator dimensions

CK25 SP

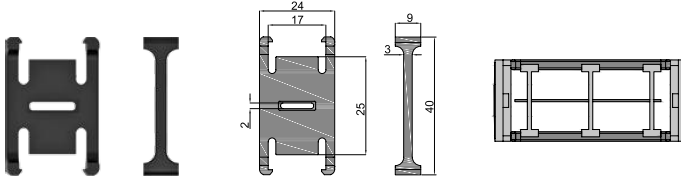


Horizontal Separator dimensions

CK25 YSP

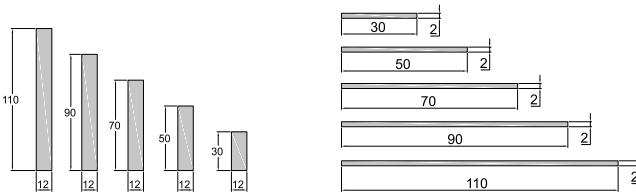


Polymer End bracket assembly dimensions

CK25 P

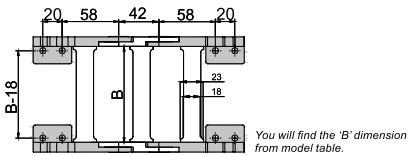

End bracket assembly



CK25 P

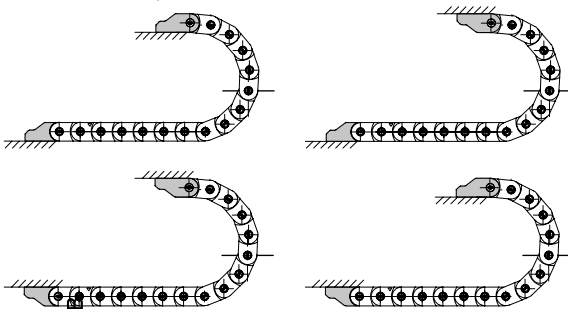

CK25 ...

Steel end bracket assembly dimensions

CK25 M

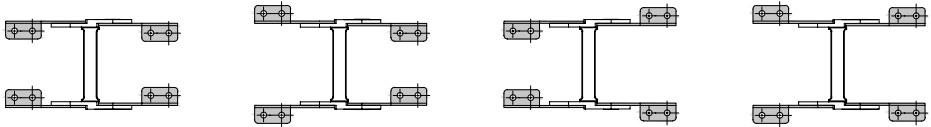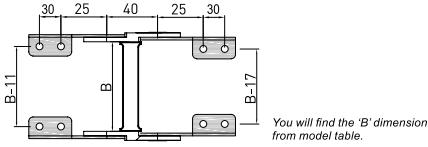

Steel end bracket assembly

CK25 M

