

CK60 A
 CK60 AL
 CK60 K
 CK60 Y


Material features
 PA6 with 30% fiberglass

Speed
 4 m/sec

Operating temperature
 -30 °C – + 130 °C



- L** Calculation of the chain length
- HM** Travel distance
- X** Mounting height
- Y** Radius length
- H** Pitch

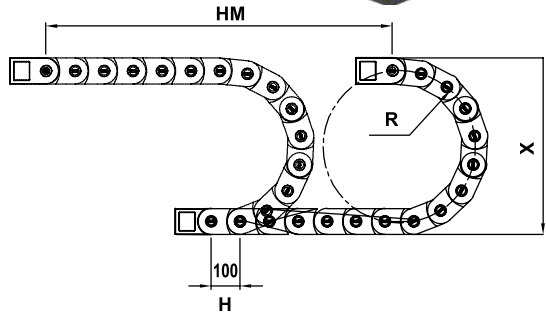

$L = HM / 2 + Y$


$X = R \times 2 + C$

$Y = R \times \pi$

Bending radius	100	150	200	250	300
H (mm)	100	100	100	100	100
X (mm)	282	382	482	582	682
Y (mm)	314	471	628	785	942

The closed cover and half covered type product radius is started from R150

Load diagram

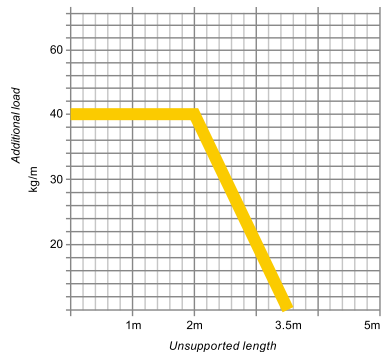


CK60 A

Openable from inside and outside

Matchcode

CK60 **A** **080** **R100**
 Inner height Open series Inner width Bending radius

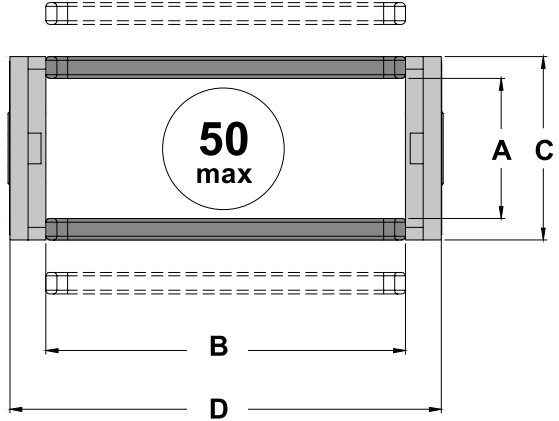

CK60 A	A	B	C	D	R	W
Model	Inner height (mm)	Inner width (mm)	Outer height (mm)	Outer width (mm)	Bending radius	Weight kg/m
CK60 A 080 R ...	60	80	82	112	100, 150, 200, 250, 300	3,120
CK60 A 100 R ...		100		132		3,252
CK60 A 120 R ...		120		152		3,384
CK60 A 140 R ...		140		172		3,494
CK60 A 160 R ...		160		192		3,582
CK60 A 180 R ...		180		212		3,670
CK60 A 200 R ...		200		232		3,846




CK60 AL

Openable from inside and outside

Matchcode

CK60 **AL** **500** **R300**
 Inner height Open series Inner width Bending radius

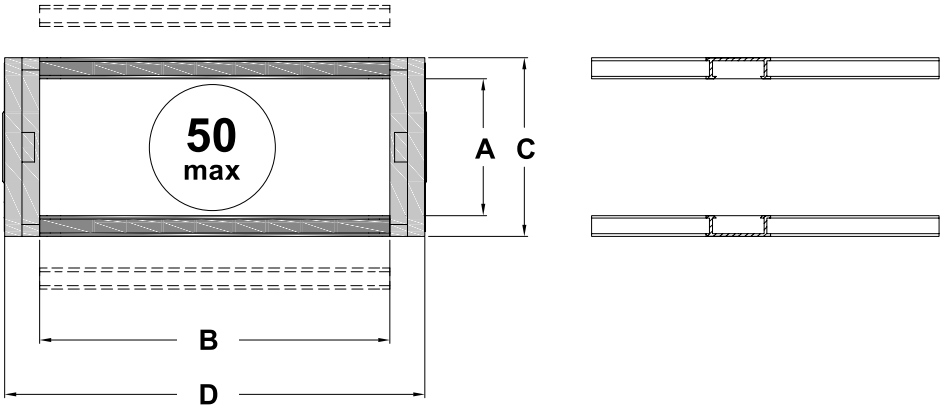

CK60 AL	A	B	C	D	R	W
Model	Inner height (mm)	Inner width (mm)	Outer height (mm)	Outer width (mm)	Bending radius	Weight kg/m
CK60 AL 250 R ...	60	250	82	282	100, 150, 200, 250, 300	4,065
CK60 AL 300 R ...		300		332		4,330
CK60 AL 400 R ...		400		432		4,858
CK60 AL 500 R ...		500		532		5,386



CK60 K

Openable from inside and outside

Matchcode

CK60

K

100


R250

Inner height

Closed series

Inner width

Bending radius

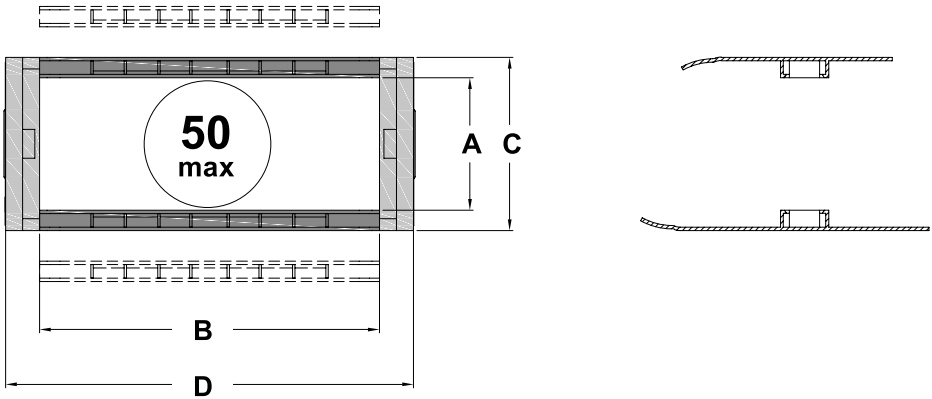

CK60 K	A	B	C	D	R	W
Model	Inner height (mm)	Inner width (mm)	Outer height (mm)	Outer width (mm)	Bending radius	Weight kg/m
CK60 K 100 R ...	60	100	82	132	150, 200, 250, 300	3,681
CK60 K 140 R ...	60	140	82	172		4,088
CK60 K 200 R ...	60	200	82	232		4,649




CK60 Y

Openable from inside and outside

Matchcode

CK60 **Y** **100** **R250**
 Inner height Half covered Inner width Bending radius

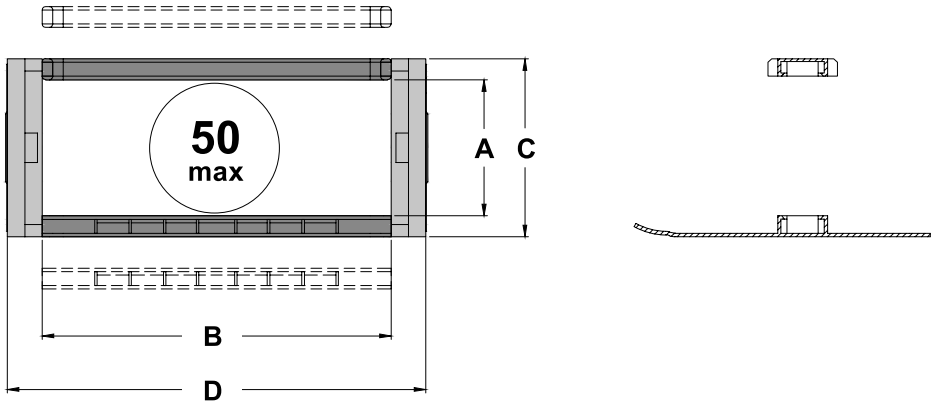


CK60 Y	A	B	C	D	R	W
Model	Inner height (mm)	Inner width (mm)	Outer height (mm)	Outer width (mm)	Bending radius	Weight kg/m
CK60 Y 100 R ...	60	100	82	132	150, 200, 250, 300	3,417
CK60 Y 140 R ...	60	140	82	172		3,736
CK60 Y 200 R ...	60	200	82	232		4,220



CK60 ...


Vertical Separator dimensions

CK60 SP

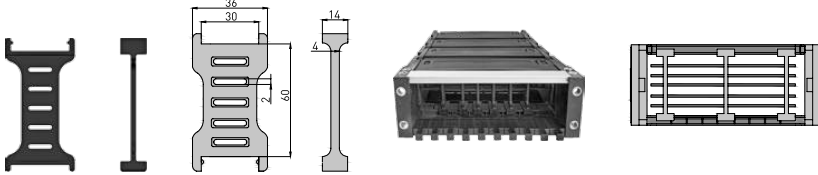



Horizontal Separator dimensions

CK60 YSP

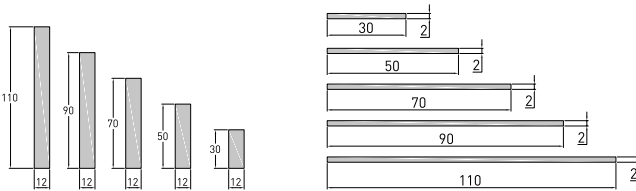


End bracket assembly dimensions

CK60 P

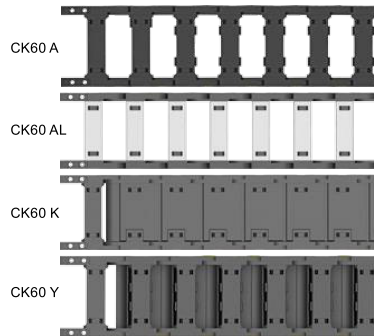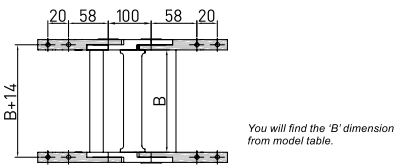


Plastic end bracket assembly


CK60 P



Steel end bracket assembly dimensions

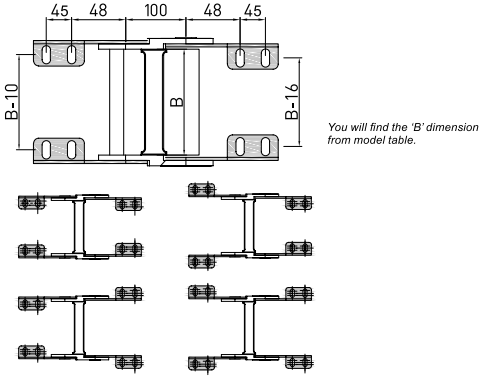

CK60 M

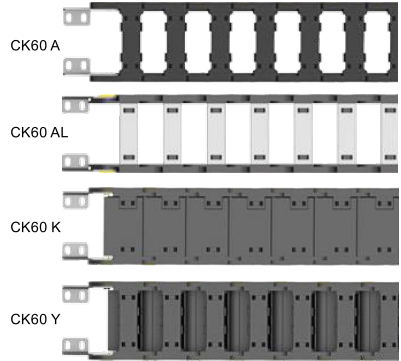

Steel end bracket assembly

CK60 M

