

CK07 F


Material features
PA6 with 30% fiberglass

Speed
8 m/sec

Operating temperature
-30 °C – + 130 °C



- L** Calculation of the chain length
- HM** Travel distance
- x** Mounting height
- Y** Radius length
- H** Pitch

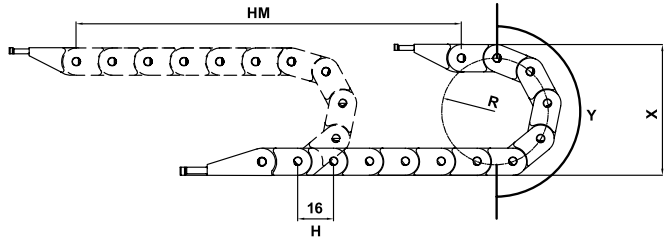


$L = HM / 2 + Y$

$X = R \times 2 + C$

$Y = R \times \pi$

Bending radius	18
H (mm)	16
X (mm)	46
Y (mm)	57

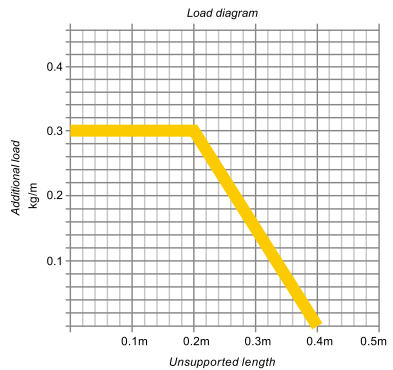


CK07 F CK07 ...

Matchcode

CK07 **F** **007** **R018**

Inner height Open series Inner width Bending radius




CK07 F	A	B	C	D	R	W
Model	Inner height (mm)	Inner width (mm)	Outer height (mm)	Outer width (mm)	Bending radius	Weight kg/m
CK07 F 007 R018	7	7	10	12	18	0,07
CK07 F 016 R018	7	16	10	21	18	0,10


Polymer End bracket assembly dimensions

CK07 P


CK07 P



CK07 P07



CK07 16

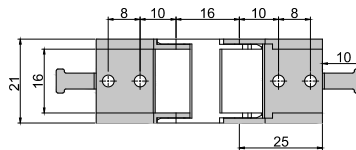

End bracket assembly

CK07 P

