



CS45 A

Open series


Matchcode

CS45 **A** **200** **R150**
Inner height Open series Inner width Bending radius

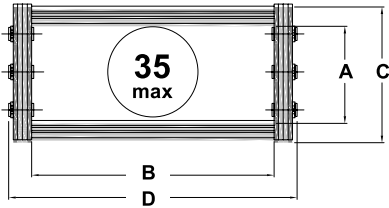

CS45 A	A	B _{min} – B _{max}	C	D _{min} – D _{max}	R
Model	Inner height (mm)	Inner width (mm)	Outer height (mm)	Outer width (mm)	Bending radius
CS45 A	45	80 – 600	63	102 – 622	75, 100, 150, 200, 250

- L Calculation of the chain length
- HM Travel distance
- X Mounting height
- Y Radius length
- H Pitch

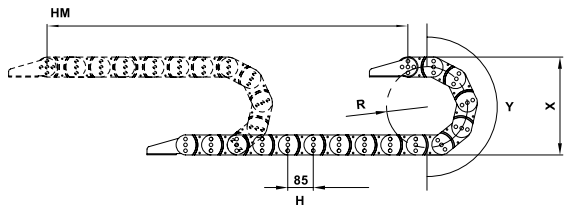



L = HM / 2 + Y

X = R x 2 + C

Y = R x π

Bending radius	75	100	150	200	250
H (mm)	85	85	85	85	85
X (mm)	213	263	363	463	563
Y (mm)	236	314	471	628	785

The closed type product radius is started from R150

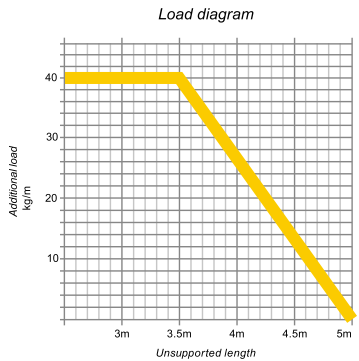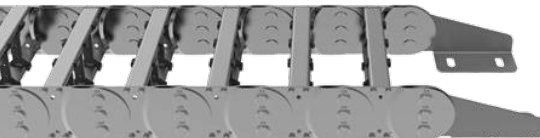


CS45 B


Special designed aluminium steel series

Matchcode


CS45 **B** **200** **R150**
 Inner height Special designed series Inner width Bending radius



D 40 mm



Hole stay inserts with horizontal and vertical slots




Hole stay inserts with individual holes

max



Available special designed for your cable and hose holes

CS45 B	A	B _{min} – B _{max}	C	D _{min} – D _{max}	R
Model	Inner height (mm)	Inner width (mm)	Outer height (mm)	Outer width (mm)	Bending radius
CS45 B	–	80 – 600	63	102 – 622	75, 100, 150, 200, 250


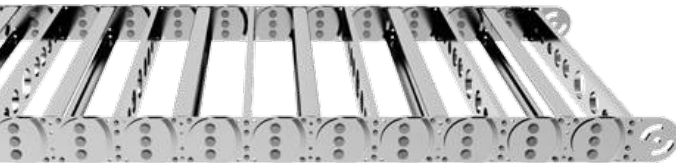


CS45 K

Closed series


Matchcode

CS45 **K** **200** **R150**
 Inner height Closed series Inner width Bending radius

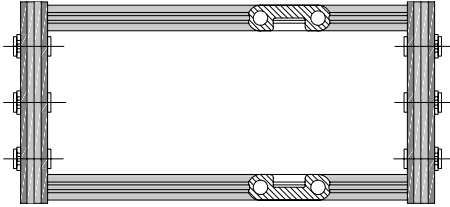


Plastic glides for longer applications

CS45 K	A	B _{min} – B _{max}	C	D _{min} – D _{max}	R
Model	Inner height (mm)	Inner width (mm)	Outer height (mm)	Outer width (mm)	Bending radius
CS45 K	45	80 – 600	63	102 – 622	150, 200, 250

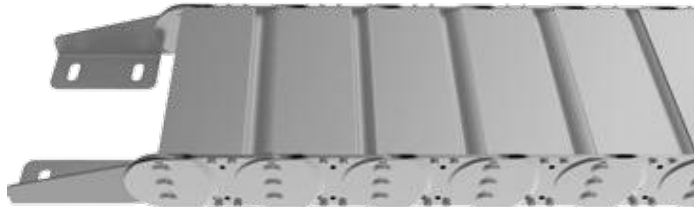



Vertical and horizontal separator

CS45 SP

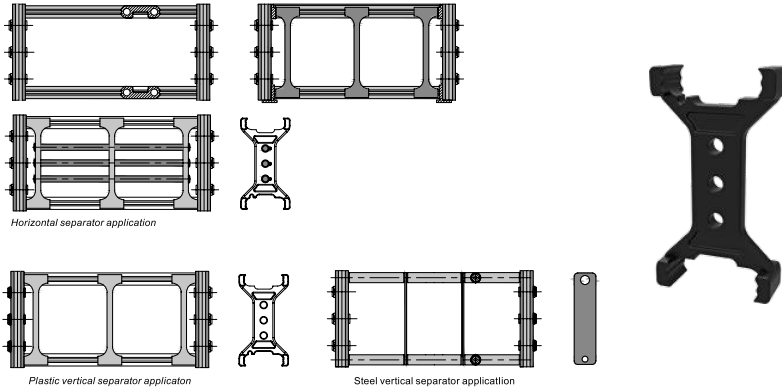

Steel end bracket assembly dimensions

CS45 M

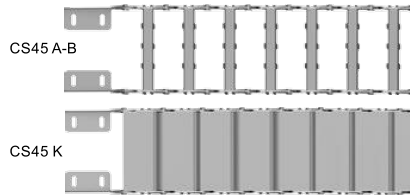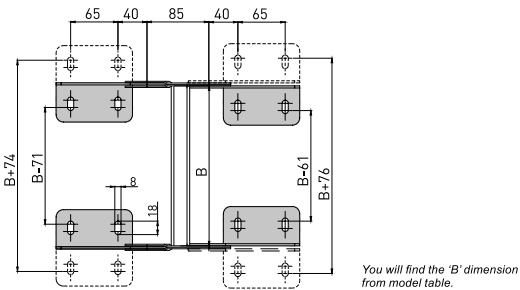

Steel end bracket assembly

CS45 M

